
CH.1
CH.2
PROT.
CLIP
-10dB
SIG.
ON
-∞
0dB
-∞
0dB
LEVEL CONTROL
TUR850
AIR FLOW
SoundFoundation
CLASS I PROFESSIONAL POWER AMPLIFIER

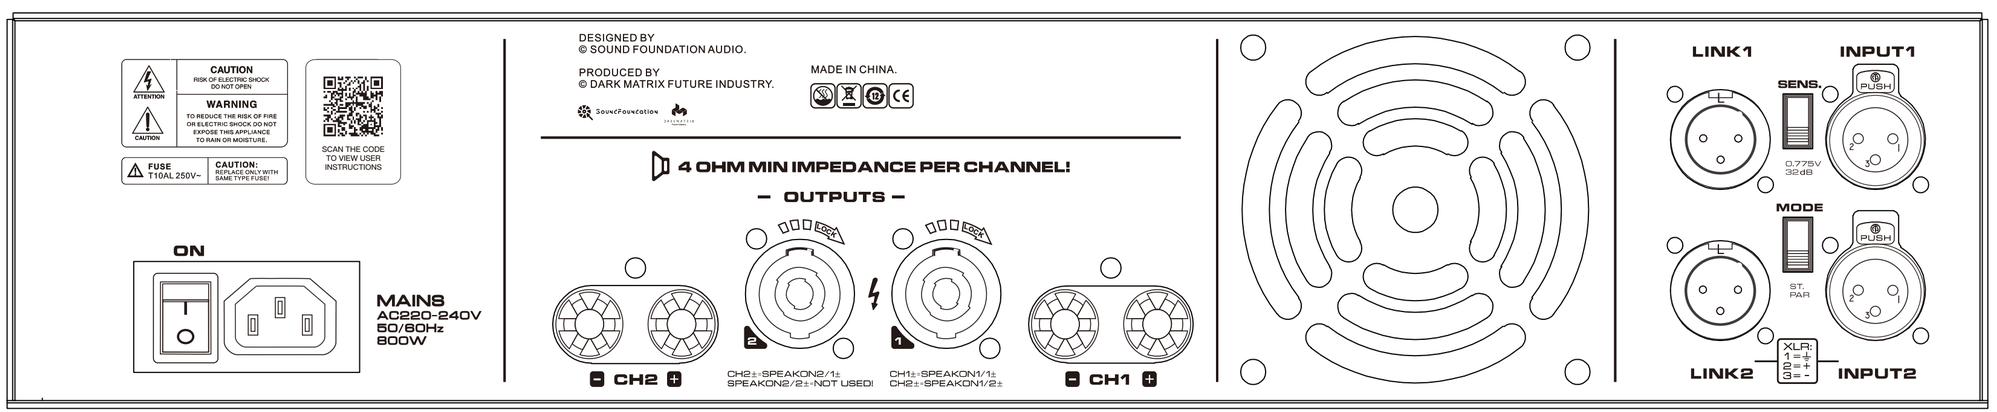
ATTENTION
CAUTION
CAUTION
RISK OF ELECTRIC SHOCK DO NOT OPEN
WARNING
TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.
FUSE T10AL 250V~
CAUTION:
REPLACE ONLY WITH SAME TYPE FUSE!
SCAN THE CODE TO VIEW USER INSTRUCTIONS
ON
MAINS
AC220-240V
50/60Hz
800W
DESIGNED BY
© SOUND FOUNDATION AUDIO.
PRODUCED BY
© DARK MATRIX FUTURE INDUSTRY.
MADE IN CHINA.
4 OHM MIN IMPEDANCE PER CHANNEL!
— OUTPUTS —
LOCK
LOCK
CH2
CH2±=SPEAKON2/1±
SPEAKON2/2±=NOT USED!
CH1±=SPEAKON1/1±
CH2±=SPEAKON1/2±
CH1
LINK1
INPUT1
SENS.
PUSH
0.775V
32dB
MODE
ST.
PAR
XLR:
1=+
2=+
3=-
LINK2
INPUT2